

HX-65

Magnet Switch




How to Order?

HX	-	65	D	-	2M
Product code		Series NO.	Switch Type R: Two wire reed switch		Wirelength 2M:2M 5M:5M 10M:10M QD8: QD8 Male connector QD12: QD12 Male connector
Note: The standard wire length of the quick connector is 0.15m. Other wire lengths cannot be ordered					


Dimension

Groove Dimension



Suitable for cylinder:
FVBC/EXSM/
EXSWM/SF/SFM

M8/M12 male wiring diagram

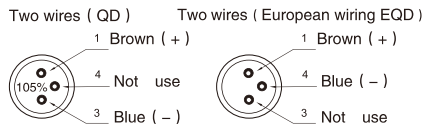

Type	HX-65R
Connect Diagram	
Parameter	
Wiring method	2-Wire Type
Switching logic	SPST Normally Open
Sensor type	Reed switch
Operating voltage	5-240V DC/AC
Max. switching current	100mA max.
Contact rating	10W max.
Current consumption	None
Voltage drop	2.5 V max.
Leakage current	None
Indicator	Red LED
Max. exchange frequency	200Hz
Temperature range	-10 - 70°C
Shock	30G
Vibration	9G
Enclosure classification	IEC 529 IP67 (NEMA 6)
Protection circuit	1
Cable	2.6 Φ ,2C,Black color,oil resistance PVC
Switch sensitive	70G